

#### DRAWING NOTES: (TYPICAL FOR THIS DRAWING ONLY)


- (1) NEW CONNECTION TO BE MADE AT THIS LOCATION. REMOVE ALL PIPING, VALVING, HANGERS, INSULATION, ETC. SHOWN DASHED BEYOND THIS POINT.
- (2) REMOVE ALL PIPING, VALVING, HANGERS, INSULATION, ETC. SHOWN DASHED.
- (3) EXISTING PIPING AND VALVING TO REMAIN.
- (4) EXISTING HVAC EQUIPMENT TO REMAIN.
- (5) REMOVE BOILER AND ALL ASSOCIATED PIPING, VALVING, FLUE, BREECHING, AND CONTROLS. REMOVE DISCONNECT SWITCHES AND ALL CONDUITS AND CONDUCTORS BETWEEN EQUIPMENT AND PANEL. LEAVE CIRCUIT BREAKER AT 'OFF' POSITION AND INDICATE CIRCUIT AS "SPARE" IN PANELBOARD DIRECTORY.
- (6) MAKE NEW CONNECTION TO EXISTING PIPING AT THIS LOCATION.
- 7 REMOVE ALL PIPING, VALVING, HANGERS, INSULATION, ETC. SHOWN DASHED AND CAP AT MAIN.
- (8) BALANCE EXISTING PUMP TO 150 GPM.
- (9) BALANCE EXISTING PUMP TO FLOW RATE MEASURED BY PRELIMINARY SYSTEM TEST.
- (10) 6" PVC OR INSULATED SHEET METAL COMBUSTION AIR.
- (11) TERMINATE 6" COMBUSTION AIR THRU WALL WITH 45° ELBOW WITH BIRDSCREEN
- (12) 6" AL29-4C UP THRU ROOF. UTILIZE ROOF OPENING AND PROVIDE NEW ROOF CURB. TERMINATE COMBUSTION AIR 60" ABOVE ROOF WITH RAIN CAP.
- (13) REMOVE ALL DUCTWORK, DIFFUSERS, REGISTERS, HANGERS, INSULATION, ETC.
- (14) REMOVE EXPANSION TANK AND ALL ASSOCIATED PIPING, VALVING, SUPPORTS, HANGERS, INSULATION, ETC.
- (15) REMOVE AIR SEPARATOR AND ALL ASSOCIATED PIPING, VALVING, SUPPORTS, HANGERS, INSULATION, ETC. REMOVE MAKE-UP WATER BACK TO DOMESTIC MAIN AND CAP WHERE NOT INDICATED FOR RE-USE.
- (16) PIPE OVER TO NEAREST FLOOR DRAIN.
- (17) SEE DETAIL ELSEWHERE.
- (18) EXISTING MAKE UP WATER ASSEMBLY TO REMAIN.
- (19) PROVIDE NEW TRIPLE DUTY VALVE AT DISCHARGE OF PUMP.
- 20 WIRE 3#12, 1#12G. IN 3/4"C. TO (1) NEW 15A-2P CIRCUIT BREAKER OF TYPE AND AIC RATING TO MATCH EXISTING PANEL "S/E". UTILIZE AVAILABLE BUSSED SPACE FOR INSTALLATION OF NEW CIRCUIT BREAKER. PROVIDE UPDATED TYPEWRITTEN DIRECTORY TO REFLECT CHANGES. FIELD VERIFY EXACT REQUIREMENTS.
- (21) PROVIDE NEW FEED TO EXISTING PUMP TO REMAIN. REMOVE ALL ASSOCIATED STARTER, DISCONNECT SWITCH, CONDUITS AND CONDUCTORS BETWEEN EQUIPMENT AND PANEL. LEAVE CIRCUIT BREAKER AT 'OFF' POSITION AND INDICATE CIRCUIT AS "SPARE" IN PANELBOARD DIRECTORY.
- 22) PROVIDE 240VAC. COMBINATION MOTOR STARTER/SAFETY SWITCH, FVNR, SIZE AS INDICATED WITH DUAL ELEMENT FUSES SIZED PER EQUIPMENT MANUFACTURER'S RECOMMENDATION. PROVIDE WITH DOOR MOUNTED HAND-OFF-AUTO SWITCH AND PILOT LIGHT. INCLUDE CONTROL TRANSFORMER, (I) N.O., (I) N.C. CONTROL CONTACTS AND NEMA I ENCLOSURE.
- (23) WIRE 3#12, I#12G. IN 3/4"C. TO (1) NEW 25A-3P CIRCUIT BREAKER OF TYPE AND AIC RATING TO MATCH EXISTING PANÉL "S/E". UTILIZE AVAILABLE BUSSED SPACE FOR INSTALLATION OF NEW CIRCUIT BREAKER. PROVIDE UPDATED TYPEWRITTEN DIRECTORY TO REFLECT CHANGES. FIELD VERIFY EXACT REQUIREMENTS.
- (24) NEW EMERGENCY FUEL SHUT-OFF SWITCH AS MANUFACTURED BY EATON #10250T5B62-S108 OR APPROVED EQUAL. MOUNT SWITCH AT 6'-0" A.F.F. ADJACENT TO THE EXIT DOOR. PROVIDE CONTACT BLOCKS, CONDUCTORS AND CONDUITS AS REQUIRED TO EACH BOILER FOR FUEL CUT-OFF.
- (25) PROVIDE CARBON MONOXIDE DETECTOR MONITORED BY FIRE ALARM SYSTEM. DETECTOR SHALL HAVE INTEGRAL SOUNDER OR BE MOUNTED ON A SOUNDER BASE. GENERATE A DISTINCT TONE IN A FOUR-PULSE TEMPORAL PATTERN, DIFFERENT FROM OTHER ALARM SIGNALS. DETECTOR SHALL ANNUNCIATE ONLY AT THE DEVICE, FIRE COMMAND PANEL AND FIRE ALARM ANNUNCIATOR PANELS.

### **EQUIPMENT SCHEDULE:**

- (HWB-1) BASE BID: HYDROTHERM MODEL 'KN-16' HOT WATER BOILER WITH 1,600 MBH (HWB-2) HEATING INPUT. BOILER TO OPERATE AT 208V/IPH WITH 7 AMP DRAW. PROVIDE CSD-I BURNER AND CONTROLS SIZED FOR 2.0 PSI INLET PRESSURE, FLOW SWITCH, HIGH LIMIT SWITCH, LOW WATER CUT OFF, AIR VENT, CONDENSATE NEUTRALIZING CARTRIDGE, 100 PSI RELIEF VALVE, AND BAS INTERFACE COMPATIBLE WITH EXISTING TRANE SUMMIT BAS SYSTEM. ALT. BID #1: CAMUS MODEL 'ADVANTUS' HOT WATER BOILER WITH SIMILAR CAPACITY AND ACCESSORIES AS BASE BID.
- (HWP-2) B&G 'SERIES 80' 3x3x7B (OR TACO, ARMSTRONG EQUAL) INLINE CIRCULATOR TO CIRCULATE 150 GPM AT 30' WITH 2 HP 208V/3PH MOTOR AND 6" IMPELLER.
- ( AS-1 ) B#G MODEL CRS-4 (OR SPIROVENT, TACO, ARMSTRONG EQUAL) DIRT AND AIR SEPARATOR WITH REMOVABLE HEAD FOR SERVICE.
- (ET-1) B&G MODEL B-200 (OR TACO, ARMSTRONG EQUAL) VERTICAL BLADDER TYPE EXPANSION TANK TO ACCEPT 53 GALLONS.

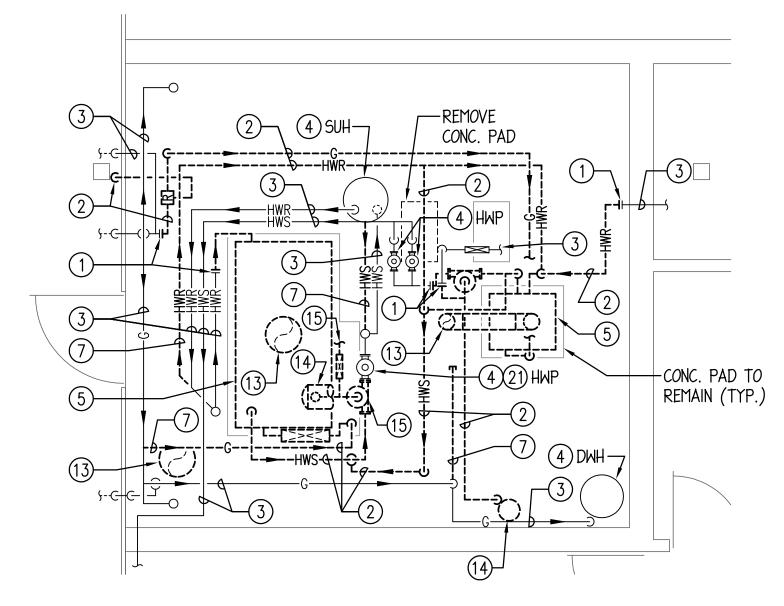


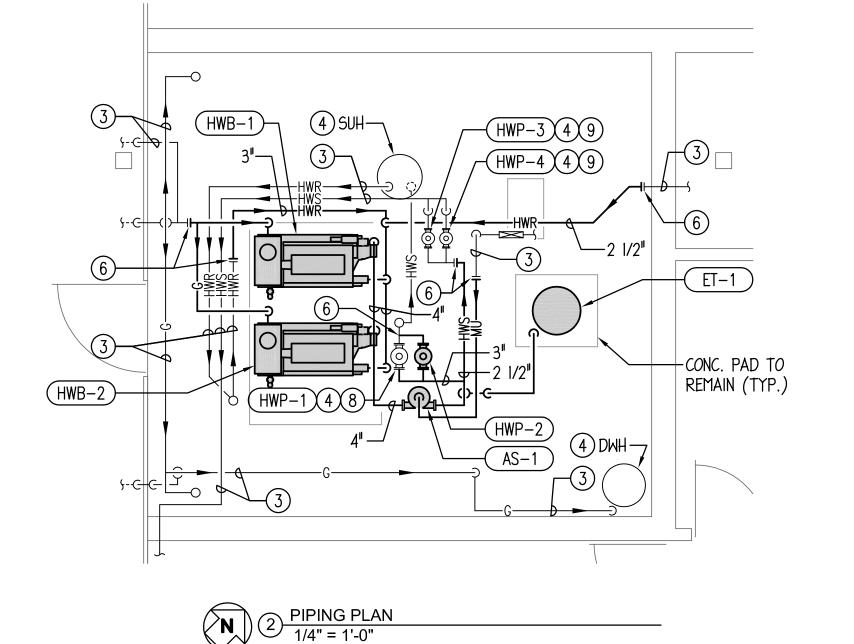

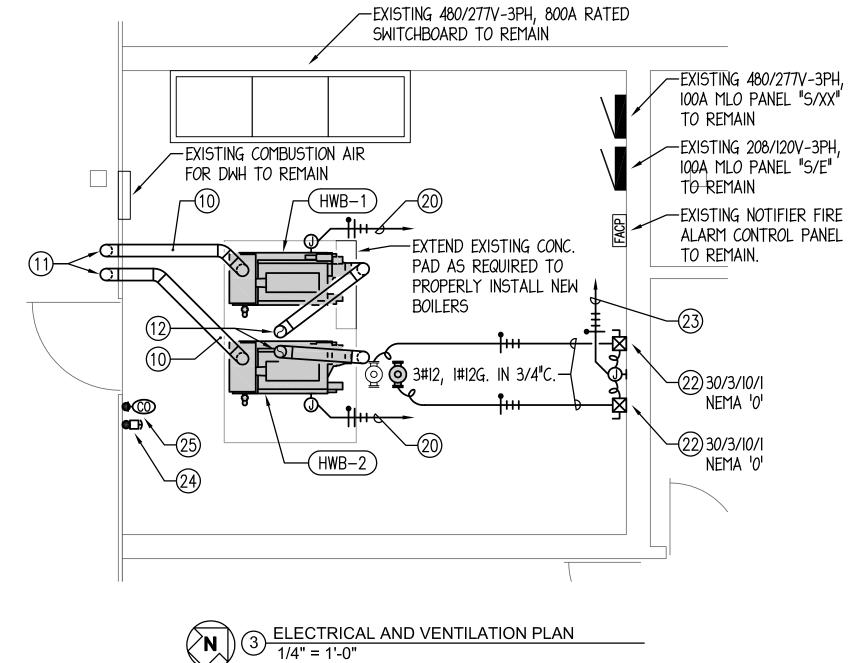

TEST AND BALANCING NOTE: CONTRACTOR SHALL PERFORM WATER FLOW RATE TEST FOR (2) TACO HOT WATER PUMPS AND SUBMIT REPORT TO OWNER/ENGINEER FOR REVIEW PRIOR TO START OF PROJECT.

MECHANICAL/ELECTRICAL DEMOLITION PLAN

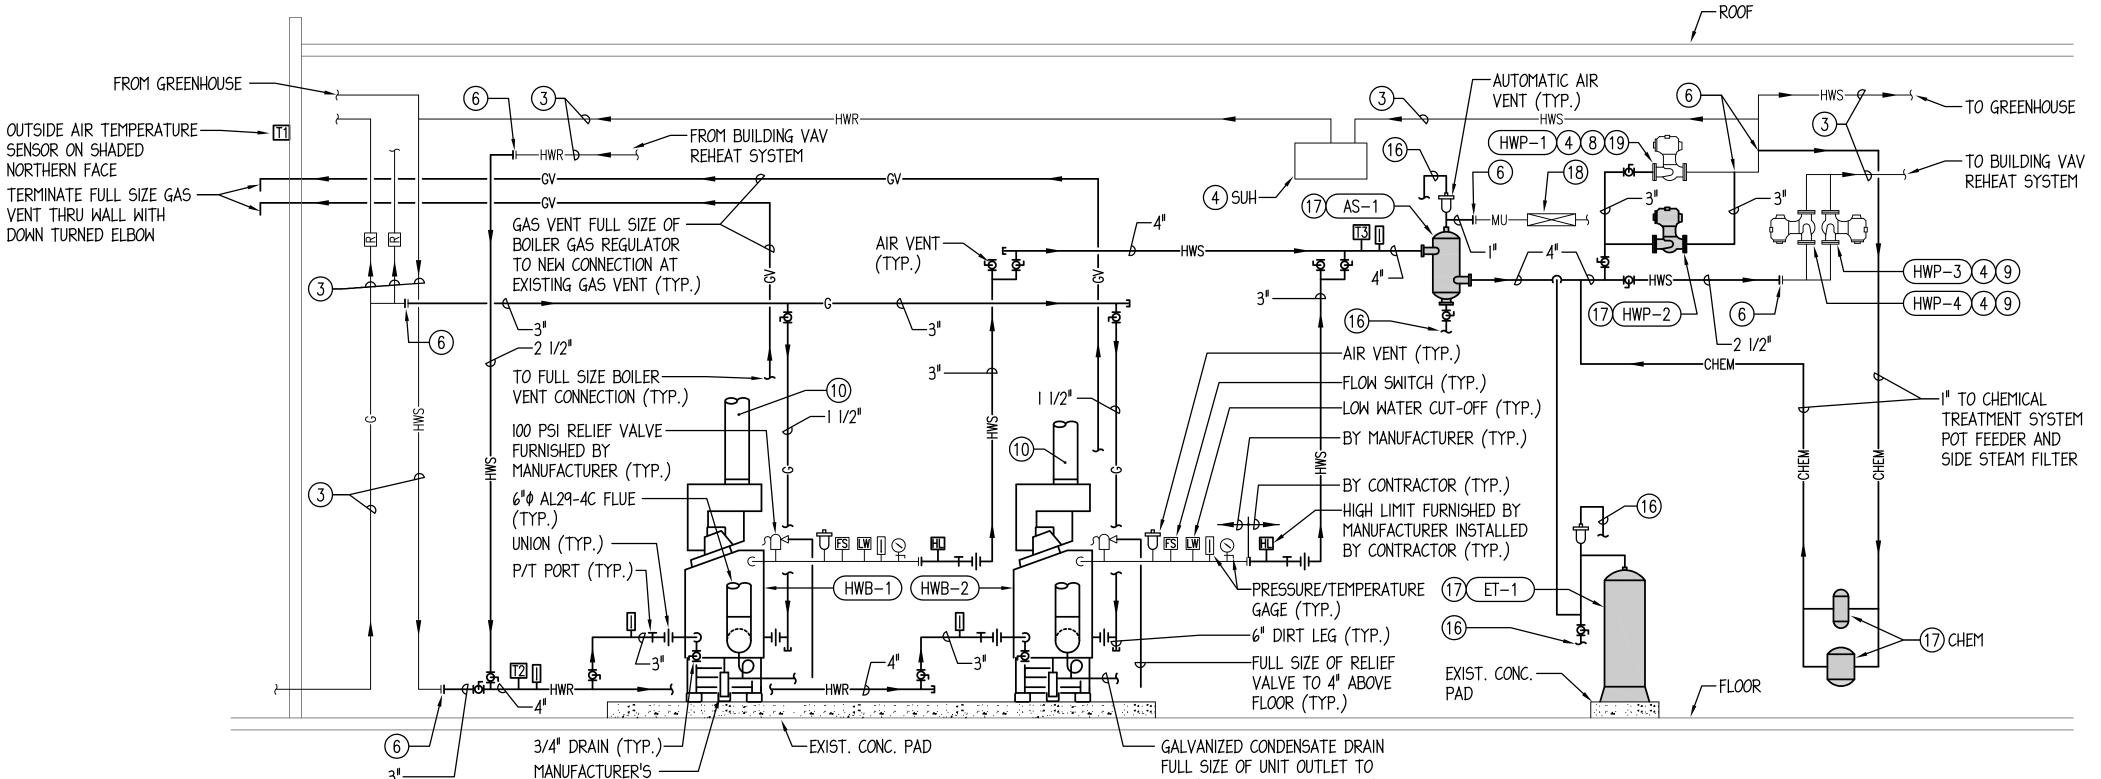

# SCHEMATIC DIAGRAM OF CONNECTIONS TO CENTRAL HEATING PLANT EQUIPMENT

CONDENSATE

(TYP.)

NEUTRALIZING KIT

DISCHARGE OVER FLOOR DRAIN

WITH DOWN TURNED ELBOW


(TYP.)

## FIRE ALARM NOTE

ALL NEW FIRE ALARM DEVICES SHALL BE COMPATIBLE WITH EXISTING FIRE ALARM SYSTEM. PROVIDE ALL EXPANSION MODULES, POWER SUPPLIES, WIRING AND LABOR TO EXPAND SYSTEM TO ACCEPT NEW DEVICES SHOWN, INCLUDE ALL PROGRAMMING AND TESTING AS REQUIRED.

INSTALLING CONTRACTOR SHALL SUBMIT PRODUCT DATA, CALCULATIONS AND SHOP DRAWINGS INDICATING DEVICE LOCATIONS AND ADDRESSABLE IDENTIFICATIONS TO LOCAL AUTHORITY HAVING JURISDICTION FOR REVIEW AND APPROVAL.

ALL FIRE ALARM WORK SHALL BE CARRIED OUT BY FOX VALLEY FIRE \$ SAFETY (847-695-5990) LOCATED IN ELGIN, ILLINOIS.



8900 US HWY 14 - BLG. 'D' CRYSTAL LAKE, IL 60012

04/13/2016 | BIDDING DOCUMENTS DESCRIPTION Mechanical - Electrical Engineers 1216 Tower Road Schaumburg, Illinois 60173 847.882.201 Fax 847.882.2201 ENGINEERING GROUP LLC

Sheet Title MECHANICAL/ELECTRICAL PLANS AND DETAILS

PROJ. MGR: 20/10 DRAWN BY: 20/10

**ME-1** CHECKED BY: 20/10

#### **GENERAL REMODELING NOTES - ALL CONTRACTORS**

- 1. ALL WORK SHOWN ON DRAWINGS SHALL BE CONSIDERED NEW AND IN CONTRACT UNLESS SPECIFICALLY INDICATED OTHERWISE.
- 2. DRAWINGS ARE GENERALLY DIAGRAMMATIC. ROUTING OF PIPING, DUCTWORK, CONDUITS, RACEWAYS, ETC., AS SHOWN ON DRAWINGS, DOES NOT INTEND TO SHOW EVERY RISE, DROP, OFFSET, FITTING NOR EVERY STRUCTURAL ELEMENT THAT MAY BE ENCOUNTERED DURING THE INSTALLATION OF THIS WORK. EACH CONTRACTOR SHALL MAKE ANY REQUIRED CHANGES FROM THE GENERAL ROUTING SHOWN ON THESE DRAWINGS, SUCH AS OFFSETS, BENDS OR CHANGES IN ELEVATION DUE TO COORDINATION WITH THE WORK OF OTHER TRADE'S AND BUILDING CONSTRUCTION. ALL CHANGES SHALL BE MADE WITHOUT ADDITIONAL COST TO THE OWNER OR DELAY IN COMPLETION DATE OF THE PROJECT.
- IT IS INTENDED THAT EQUIPMENT SHALL BE LOCATED SYMMETRICALLY WITH THE ARCHITECTURAL ELEMENTS OF THE BUILDING, NOTWITHSTANDING THE FACT THAT LOCATIONS INDICATED BY THESE DRAWINGS MAY BE DISTORTED FOR CLEARNESS OF PRESENTATION.
- CONTRACTOR SHALL CHECK DRAWINGS OF OTHER TRADES TO VERIFY THAT SPACES IN WHICH THEIR WORK WILL BE INSTALLED ARE CLEAR OF OBSTRUCTIONS. WORK SHALL BE INSTALLED TO MAINTAIN MAXIMUM HEADROOM AND SPACE CONDITIONS AT ALL POINTS IN THE BUILDING. WHERE HEADROOM OR SPACE CONDITIONS APPEAR INADEQUATE, CONTRACTOR SHALL NOTIFY OWNER/ARCHITECT/ENGINEER BEFORE PROCEEDING WITH THE INSTALLATION OF THEIR WORK.
- CONTRACTOR SHALL FURNISH OTHER TRADES ADVANCE INFORMATION AND/OR SHOP DRAWINGS ON LOCATIONS AND SIZES OF PIPING, DUCTWORK, CONDUIT, RACEWAYS, EQUIPMENT, FRAMES, BOXES, SLEEVES AND OPENINGS, ETC. NEEDED FOR THEIR WORK TO PERMIT OTHER TRADES AFFECTED TO INSTALL THEIR WORK PROPERLY AND WITHOUT DELAY.
- 6. WHERE THERE IS EVIDENCE THAT WORK OF ONE TRADE WILL INTERFERE WITH WORK OF OTHER TRADES, ALL TRADES SHALL MEET ON JOB SITE TO WORK OUT SPACE CONDITIONS AND MAKE SATISFACTORY ADJUSTMENTS TO INSTALLATION OF THE NEW WORK. CONTRACTORS SHALL VERIFY EXACT LOCATIONS OF ALL DEVICES AND EQUIPMENT WITH FIELD CONDITIONS, SHOP DRAWINGS, AND WORK OF OTHER TRADES PRIOR TO ROUGH-IN. EACH CONTRACTOR SHALL BE RESPONSIBLE, AT THEIR OWN EXPENSE, FOR THE REMOVAL AND REINSTALLATION OF ANY PART OF THEIR WORK IF SAME WAS INSTALLED WITHOUT CONSULTING WITH OTHER TRADES BEFORE INSTALLING THEIR WORK.
- CONTRACTOR SHALL PROVIDE SLEEVES IN BEAMS, FLOORS, COLUMNS AND WALLS AS SHOWN ON THE DRAWINGS, AS REQUIRED BY JOB SITE CONDITIONS, AND/OR AS SPECIFIED, WHEN INSTALLING THEIR WORK. ALL BEAMS AND COLUMNS WHICH ARE REQUIRED TO BE SLEEVED SHALL BE CUT AND REINFORCED AS REQUIRED BY FIELD CONDITIONS AND LOCATIONS AND SIZES SHALL BE CHECKED AND APPROVED BY ARCHITECT BEFORE CONTRACTOR CUTS ANY STRUCTURAL BUILDING MEMBER.
- THE SEQUENCE FOR THE INSTALLATION OF ALL WORK SHALL BE COORDINATED BETWEEN ALL CONTRACTORS ON THE PROJECT AND IN STRICT ACCORDANCE WITH ARCHITECT/ENGINEER AND OWNERS STIPULATION AS DIRECTED.
- 9. CONTRACTOR SHALL REFER TO THE ARCHITECTURAL AND STRUCTURAL CONTRACT DRAWINGS (BEFORE SUBMITTING THEIR BIDS) TO FAMILIARIZE THEMSELVES WITH THE EXTENT OF THE GENERAL CONTRACTOR'S WORK, CEILING HEIGHTS AND CLEARANCE FOR INSTALLING THEIR
- 10. CONTRACTOR SHALL BE RESPONSIBLE AND PAY FOR ALL CORING, CUTTING, PATCHING, REPAIRING, REFINISHING AND REMOVAL/REPLACEMENT OF NEW OR EXISTING BUILDING CONSTRUCTION REQUIRED TO ACCOMMODATE THE INSTALLATION OR REMOVAL OF THEIR WORK. ALL PATCHING, REPAIRING AND REFINISHING WORK SHALL BE PERFORMED BY THOSE REGULARLY INVOLVED IN THAT TRADE AND SHALL MATCH THE ADJACENT CONSTRUCTION AS CLOSELY AS POSSIBLE. CARE SHALL BE TAKEN SO AS NOT TO DAMAGE ANY EXISTING BUILDING CONSTRUCTION OR ITEMS THAT ARE TO REMAIN. ANY EXISTING FINISHES THAT ARE DAMAGED DURING THE INSTALLATION OF NEW WORK OR REMOVAL OF EXISTING WORK SHALL BE REPAIRED, REPLACED AND PAID FOR BY THE INSTALLING CONTRACTOR, TO THE SATISFACTION OF THE ARCHITECT AND OWNER. REFER TO ARCHITECTURAL DRAWINGS FOR EXISTING BUILDING CONSTRUCTION THAT IS TO REMAIN AND, THEREFORE, SUBJECT TO PATCHING, REPAIRING, REFINISHING, AND REMOVAL/REPLACEMENT. (NOTE: CONTRACTOR SHALL VERIFY EXISTING BUILDING'S ROOF WARRANTY AND EMPLOY OTHER SUBCONTRACTOR(S) AS REQUIRED BY ROOF MANUFACTURER'S REPRESENTATIVE SO AS NOT TO VOID OWNER'S ROOF WARRANTY.)
- SOME OF THE EXISTING ITEMS AND EQUIPMENT SCHEDULED TO BE REMOVED SHALL BE TURNED OVER TO THE OWNER. ANY ITEMS THAT THE OWNER WANTS TO RETAIN SHALL BE REMOVED CAREFULLY SO AS NOT TO DAMAGE THEM. ALL OTHER ITEMS TO BE REMOVED SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND REMOVED FROM THE SITE.
- 12. CONTRACTOR SHALL BE RESPONSIBLE FOR THEIR OWN CLEAN-UP DURING CONSTRUCTION. IF CONTRACTOR FAILS TO PROVIDE SUCH CLEAN-UP, THE ARCHITECT/ENGINEER WILL DIRECT ANOTHER CONTRACTOR TO PERFORM THE CLEAN-UP AND THE NEGLIGENT CONTRACTOR SHALL PAY THE ASSOCIATED BACK-CHARGES AS DEEMED APPROPRIATE BY THE ARCHITECT/ENGINEER.
- 13. CONTRACTOR SHALL INSTALL ALL AUXILIARY SUPPORTING STEEL AS REQUIRED FOR THE SUPPORTING OF THEIR PIPING, DUCTWORK, CONDUIT, TANKS, EQUIPMENT, ETC. ALL SUPPORTING STEEL FOR ITEMS ABOVE A SUSPENDED CEILING SHALL BE FROM BUILDING STRUCTURAL MEMBERS ONLY.
- 14. IT IS MANDATORY THAT THE COMPLETE EXISTING BUILDING REMAIN IN CONTINUOUS AND NON-INTERRUPTED OPERATION DURING REMODELING/ALTERING OF SAID EXISTING BUILDING. THE SPECIFIC AREA(S) BEING REMODELED/ALTERED AT ANY SCHEDULED TIME ARE OBVIOUSLY EXCLUSIVE OF THIS STATEMENT. SERVICES TO EXISTING BUILDING SHALL BE KEPT IN CONTINUOUS OPERATION INCLUDING POWER, SIGNAL SYSTEMS, LIGHTING, TELEPHONE, HEATING, COOLING, VENTILATING, TEMPERATURE CONTROL, SEWERS AND HOT AND COLD WATER. ANY ABSOLUTELY NECESSARY INTERRUPTION OF THESE SERVICES TO ACCOMPLISH CONTRACT WORK SHALL BE ARRANGED WITH THE OWNER A MINIMUM OF TEN (10) WORKING DAYS IN ADVANCE. SUCH INTERRUPTIONS SHALL BE KEPT TO AN ABSOLUTE MINIMUM AS FAR AS TIME INTERVAL IS INVOLVED AND TEMPORARY SERVICES SHALL BE FURNISHED AND INSTALLED UNDER THIS CONTRACT WHERE NECESSARY TO ACCOMPLISH THIS PURPOSE. TEMPORARIES SHALL BE REMOVED BY THE CONTRACTOR ONLY AFTER NEW PERMANENT SERVICES ARE INSTALLED AND FULLY OPERATIONAL.
- 15. UNLESS INDICATED OTHERWISE, THE ARCHITECT/ENGINEER MAKES NO REPRESENTATION AS TO WHETHER OR NOT ANY HAZARDOUS OR CONTAMINATED MATERIALS (INCLUDING BUT NOT LIMITED TO ASBESTOS, PCB'S, CONTAMINATED SOILS, ETC.) ARE PRESENT WITHIN THE EXISTING BUILDING OR ON THE SITE. WORK SHOWN ON THE DRAWINGS AND/OR INDICATED IN THE SPECIFICATIONS SHALL NOT BE CONSTRUED TO CALL FOR CONTACT WITH ANY OF THESE MATERIALS. IF THESE MATERIALS ARE ENCOUNTERED OR SUSPECTED. THE CONTRACTOR SHALL NOT DISTURB THEM AND SHALL CONTACT THE ARCHITECT/ENGINEER IMMEDIATELY.

- 16. WHERE WORK CALLED FOR ON THE DRAWINGS OR IN THE SPECIFICATIONS INVOLVES THE REMOVAL OR RELOCATION OF PIPING OR EQUIPMENT CONTAINING REFRIGERANT, ALL REFRIGERANT SHALL BE RECOVERED BY APPROVED METHODS PER EPA REGULATIONS.
- CONTRACTOR SHALL STORE ALL MATERIALS AND EQUIPMENT SHIPPED TO THE SITE IN A PROTECTED AREA. IF MATERIAL IS STORED OUTSIDE OF THE BUILDING, IT MUST BE STORED OFF THE GROUND A MINIMUM OF SIX INCHES (6") SET ON 6 X 6 PLANKS AND/OR WOOD PALLETS. ALL MATERIAL AND EQUIPMENT MUST BE COMPLETELY COVERED WITH WATERPROOF TARPS OR VISQUIN. ALL PIPING AND DUCTWORK WILL HAVE THE ENDS CLOSED TO KEEP OUT DIRT AND OTHER DEBRIS. NO EQUIPMENT WILL BE ALLOWED TO BE STORED OUTSIDE THE BUILDING ON THE SITE UNLESS IT IS SUPPORTED OFF THE GROUND AND COMPLETELY PROTECTED WITH WEATHERPROOF COVERS.
- THE DRAWINGS, SCHEDULES AND SPECIFICATIONS HAVE BEEN PREPARED USING ONE MANUFACTURER FOR EACH PIECE OF EQUIPMENT AS THE BASIS FOR DIMENSIONAL DESIGN. IF THE CONTRACTOR PURCHASES EQUIPMENT FROM A SPECIFIED ACCEPTABLE MANUFACTURER, BUT NOT THE SCHEDULED MANUFACTURER USED FOR THE BASE DESIGN, THE CONTRACTOR SHALL BE RESPONSIBLE FOR CHECKING ALL THE DIMENSIONS OF THE EQUIPMENT TO VERIFY THAT IT WILL FIT IN THE SPACE SHOWN ON THE DRAWINGS. MINOR DEVIATIONS IN DIMENSIONS WILL BE PERMITTED, PROVIDED THE RATINGS MEET THOSE SHOWN ON THE DRAWINGS AND EQUIPMENT WILL PHYSICALLY FIT INTO THE SPACE ALLOCATED WITH SUITABLE ACCESS AROUND EQUIPMENT FOR OPERATION AND MAINTENANCE OF THE EQUIPMENT. WHEN EQUIPMENT SUBMITTED FOR REVIEW DOES NOT MEET THE PHYSICAL SIZE OR ARRANGEMENT OF THAT SCHEDULED AND SPECIFIED, CONTRACTOR SHALL PAY FOR ALL ALTERATIONS REQUIRED TO ACCOMMODATE SUCH EQUIPMENT AT NO ADDITIONAL COST TO THE OWNER. CONTRACTOR WILL ALSO PAY ALL COSTS FOR ADDITIONAL WORK REQUIRED BY OTHER CONTRACTORS, OWNER, ARCHITECT OR ENGINEER TO MAKE CHANGES WHICH WOULD ALLOW THE EQUIPMENT TO FIT IN THE SPACE AND FUNCTION AS INTENDED.
- CONTRACTOR AND/OR MANUFACTURER SHALL VERIFY THAT THE CHARACTERISTICS OF THE EQUIPMENT HE SUBMITS FOR REVIEW MEET THE CAPACITY AND DUTY SPECIFIED. WHEN EQUIPMENT SUBMITTED FOR REVIEW REQUIRES MODIFICATIONS TO THE WORK OF OTHER CONTRACTORS, SUBMITTING CONTRACTOR SHALL PAY FOR ALL COSTS FOR ADDITIONAL WORK REQUIRED BY OTHER CONTRACTORS, OWNER, ARCHITECT OR ENGINEER TO MAKE CHANGES WHICH WOULD ALLOW THE EQUIPMENT FUNCTION SAFELY AND PROPERLY.
- 20. CONTRACTOR SHALL FIELD VERIFY THE SIZE OF EXISTING OPENINGS, WINDOWS, DOORS, CORRIDORS, ROOMS, ETC. FOR ACCESS OF THE NEW EQUIPMENT INTO OR REMOVAL OF EXISTING EQUIPMENT FROM THE BUILDING. IF OPENINGS ARE TOO SMALL FOR ACCESS THEN CONTRACTOR SHALL, AT HIS OWN EXPENSE, PROVIDE NEW OR ENLARGED OPENINGS AND RESTORE SAME TO ORIGINAL SIZE AND CONDITION. CONTRACTOR MAY ELECT TO ORDER THE EQUIPMENT DISASSEMBLED AND/OR WITH SPLIT HOUSING FOR ENTRANCE INTO THE EXISTING SPACE OR BUILDING. CONTRACTOR SHALL REASSEMBLE EQUIPMENT AFTER IT IS IN THE SPACE AT HIS OWN EXPENSE.
- 21. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND THEIR ASSOCIATED FEES.
- 22. CONTRACTOR SHALL SUBMIT ELECTRONIC COPIES OF SHOP DRAWINGS OF ALL EQUIPMENT, TEMPERATURE CONTROL SYSTEM, BOILERS, VALVING, FLUE PIPING, PANELBOARDS, ELECTRICAL DEVICES TO ENGINEER FOR APPROVAL PRIOR TO ORDERING ANY ITEMS OR FABRICATING ANY DUCTWORK/PIPING.
- 23. CONTRACTOR SHALL PROVIDE OWNER TRAINING ON ALL EQUIPMENT AND BUILDING SYSTEMS PROVIDED/ALTERED BY HIS WORK. TRAINING SHALL BE ACCOMPLISHED DURING TIME DEDICATED FOR THAT PURPOSE, NOT IN CONJUNCTION WITH SERVICE WORK. SEE SPECIAL TEMPERATURE CONTROL TRAINING INSTRUCTIONS ELSEWHERE.
- 24. AT COMPLETION OF PROJECT, CONTRACTOR SHALL SUBMIT ELECTRONIC COPIES OF OPERATION AND MAINTENANCE MANUALS FOR ALL WORK PROVIDED BY HIM ON PROJECT. MANUALS SHALL BE CLEARLY ORGANIZED AND CONTAIN COPIES OF APPROVED EQUIPMENT. SHOP DRAWINGS. EQUIPMENT PARTS LISTS. SERVICE CONTACTS. CONTRACTOR AND MANUFACTURER WARRANTEES. AND "AS BUILT" FLOOR PLANS.
- 25. CONTRACTOR SHALL PROVIDE WARRANTY FOR ALL MATERIAL AND GUARANTEE ALL WORKMANSHIP PROVIDED BY HIM FOR I (ONE) YEAR FROM SUBSTANTIAL COMPLETION OF WORK INVOLVED.
- 26. CONTRACTOR SHALL MAINTAIN A CURRENT LICENSE THROUGHOUT ALL PHASES OF CONSTRUCTION WITH THE CODE ENFORCING BODY. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO COORDINATE ALL INSPECTIONS WITH CODE ENFORCING BODY.
- 27. IDENTIFY ALL PIPING AND DUCTWORK WITH PLASTIC LABELS INDICATING CONTENTS AND FLOW DIRECTION. MARKERS TO BE PLACED AT A MAXIMUM OF 50 FT. INTERVALS AT BRANCH CONNECTIONS, AND AT BOTH SIDES OF WALL/FLOOR PENETRATIONS. IDENTIFY VALVES, EQUIPMENT, AND PANELS WITH ENGRAVED 3-LAYER PLASTIC LAMINATED TAGS OR SIGNS.

### **GENERAL NOTES - HVAC WORK:**

- ALL NEW WORK AND MATERIALS SHALL CONFORM TO COMMUNITY COLLEGE CODE AND McHENRY COUNTY COLLEGE BUILDING STANDARDS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL REQUIRED PERMITS AND INSPECTIONS AND PAYING THEIR ASSOCIATED FEES.
- 3. NOISE AND VIBRATION WILL NOT BE TOLERATED. CONTRACTOR SHALL BID ON FURNISHING EVERY DETAIL TO ASSURE THIS END.
- 4. PATCH AND REFINISH ALL DAMAGED INSULATED SURFACES OF ALL EXISTING PIPING AND ASSOCIATED FITTINGS TO MATCH EXISTING WHERE NEW CONNECTIONS ARE BEING MADE.
- 5. CONTRACTORS SHALL PROVIDE A ONE YEAR WARRANTY ON ALL MATERIALS, EQUIPMENT AND LABOR FROM DATE OF
- SUBSTANTIAL COMPLETION OF WORK EXCEPT AS FOLLOWS: a. PROVIDE 10 YEAR PARTS AND LABOR WARRANTY FOR BOILER HEAT EXCHANGERS.
- THE FLUE AND STACK PIPING SHALL BE WARRANTED AGAINST FUNCTIONAL FAILURE DUE TO DEFECTS IN MATERIAL AND MANUFACTURER'S WORKMANSHIP FOR A PERIOD OF 10 YEARS FROM THE DATE OF DELIVERY.
- 6. COMBUSTION AIR PIPING SHALL BE SCH. 40 PVC WITH SOLVENT WELDED JOINTS/COUPLINGS OR GALVANIZED SHEET METAL INSULATED 2" THICK WITH FLEXIBLE FIBERGLASS INSULATION WITH VAPOR BARRIER JACKET.
- FLUE PIPING SHALL BE AL29-4C DOUBLE WALL GAS VENT AS MANUFACTURERED BY SCHEBLER, SELKIRK -METALBESTOS, AMPCO, OR METALFAB. THE FACTORY BUILT SYSTEM SHALL BE MADE IN ACCORDANCE WITH NFPA 211. THIS STACK SYSTEM SHALL BE DESIGNED AND INSTALLED TO BE GAS TIGHT. IT SHALL BE UL LISTED TO WITHSTAND UP TO 15" W.C. POSITIVE PRESSURES. THIS SYSTEM SHALL BE DESIGNED TO COMPENSATE FOR ALL FLUE GAS INDUCED THERMAL EXPANSIONS. AIR GAP BETWEEN INNER AND OUTER PIPE SHALL BE I INCH THICK. CLEARANCES TO COMBUSTIBLE MATERIALS SHALL BE PER INSTALLATION INSTRUCTIONS. THE JOINT ASSEMBLY SHALL BE A MALE/FEMALE SLIP-TYPE JOINTING WITH MECHANICALLY GASKETED FLANGE TO FLANGE AND V-BAND ASSEMBLY (CAULKED OR SCREWED JOINTS ARE NOT ACCEPTABLE). AN INTERNAL SLEEVE SERVES FOR READILY ALIGNMENT AS WELL AS LONG TERM JOINT SEAL PROTECTION FROM CONDENSATE, WATER AND FLUE GAS TEMPERATURE. THE DOUBLE WALL STACK HAS AN INNER GAS CARRYING PIPE OF 24 GAUGE TYPE AL29-4C. THE OUTER JACKET SHALL BE 24 GAUGE 304 STAINLESS STEEL. THE MATERIALS AND CONSTRUCTION OF THE MODULAR SECTIONS AND ACCESSORIES SHALL BE AS SPECIFIED BY THE TERMS OF THE PRODUCT'S UL LISTING. PITCH FLUE PIPING TOWARD BOILER AS REQUIRED BY FLUE MANUFACTURER'S INSTALLATION INSTRUCTION, BUT NOT LESS THAN 1/4" PER FOOT.
- HOT WATER HEATING SUPPLY AND RETURN PIPING SHALL BE SCHEDULE 40 BLACK STEEL OR TYPE "L" COPPER, INSULATED WITH I" THICK FIBERGLASS WITH ALL SERVICE JACKET. PROVIDE DIELECTRIC NIPPLES OR BRASS VALVES BETWEEN DISSIMILAR PIPE MATERIALS.
- NATURAL GAS PIPING SHALL BE SCHEDULE 40 BLACK AND CONFORM WITH ASTM STANDARDS WELDED FOR PIPE SIZES 2 1/2" AND OVER AND SCREWED FOR PIPE SIZES 2" AND UNDER.
- 10. ALL PIPING SHALL BE SUSPENDED WITH CLEVIS AND/OR TRAPEZE PIPE HANGERS. INSULATED PIPING SHALL REST ON SHEET METAL INSULATION SHIELDS. ANCHORS SHALL BE DRILLED INTO EXISTING FLOOR CONSTRUCTION.
- II. PITCH ALL SUPPLY AND RETURN WATER LINES TO DRAIN COMPLETELY THROUGH LOWER EQUIPMENT, UNIONS, OR DRAIN VALVES. INSTALL A 1/2" DRAIN VALVE WITH HOSE THREAD OUTLET IN ALL MAIN PIPING RUNS WHICH WOULD NOT BE ABLE TO DRAIN THRU A LOWER PIECE OF EQUIPMENT. PROVIDE MANUAL AIR VENTS IN ALL PIPE DROPS IN DIRECTION OF FLOW.
- 12. ALL HOT WATER SUPPLY AND HOT WATER RETURN PIPING SHALL BE INSTALLED TO COMPENSATE FOR EXPANSION OF THE PIPE BY INSTALLING PIPE ANCHORS, GUIDES, EXPANSION JOINTS OR LOOPS AND PIPE OFFSETS AS REQUIRED BY FIELD CONDITIONS OR AS SHOWN ON THE DRAWINGS.
- 13. FLUSH, CLEAN, PRESSURE TEST AND CHARGE ALL NEW PIPING SYSTEMS AND EXTENSION TO PIPING SYSTEMS. TESTING SHALL BE MINIMUM 50 PSI HIGHER THAN NORMAL OPERATING PRESSURE OF SYSTEM.
- 14. BALL OR BUTTERFLY VALVES SHALL BE STOCKHAM, MILWAUKEE, OR NIBCO WITH BRONZE BODY, STAINLESS STEEL BALL, TEFLON SEATS AND STUFFING BOX RING, LEVER HANDLE, SOLDER OR ENDS WITH UNION.
- 15. ALL CIRCUIT SETTERS SHALL BE BELL AND GOSSETT.
- 16. PROVIDE GAS SHUT-OFF VALVE AT EACH PIECE OF EQUIPMENT AND PRESSURE REGULATORS WHERE REQUIRED. VENT ALL PRESSURE REGULATORS WITHIN THE BUILDING FULL SIZE TO BUILDING EXTERIOR.
- 17. BALANCE HOT WATER HEATING SYSTEM TO ACCOMPLISH WATER FLOW SHOWN AT ALL TERMINALS AS SHOWN ON DRAWINGS AND SUBMIT TEST REPORT FOR REVIEW BY OWNER AND ENGINEER.
- 18. FLUSH/CLEAN ALL PORTIONS OF NEW SYSTEM WITH HOH C-312 (OR EQUAL) CLEANER ADMINISTERED IN ACCORDANCE WITH CHEMICAL TREATMENT SUB-CONTRACTOR'S RECOMMENDATIONS. WHERE NEW SYSTEMS CONNECT TO EXISTING, TEMPORARY HOSE SHALL LOOP SUPPLY/RETURN PIPING TO FLUSH ENTIRE SYSTEM. PROVIDE NEW HYDRONIC CHEMICAL INHIBITORS AS REQUIRED TO MAINTAIN INTEGRITY OF EXISTING HYDRONIC SYSTEM - COORDINATE WITH

#### **GENERAL NOTES - TEMPERATURE CONTROL:**

- ALL WORK SHALL CONFORM TO THE LATEST EDITION OF NATIONAL ELECTRIC CODE AND COMMUNITY COLLEGE BUILDING CODE.
- 2. BAS LOW VOLTAGE WIRING SHALL BE U/L LISTED, LOW SMOKE PRODUCING, PLENUM RATED. WIRING SHALL BE IN CONDUIT WHERE EXPOSED IN EQUIPMENT ROOMS OR CONCEALED IN WALLS, CHASES, OR ABOVE NON-ACCESSIBLE CEILINGS. LOW VOLTAGE PLENUM RATED WIRING MAY BE INSTALLED WITHOUT CONDUIT ABOVE ACCESSIBLE LAY-IN CEILING SPACES ONLY.
- 3. ALL CONDUIT SHALL BE LOCATED SO AS NOT TO INTERFERE WITH ANY EQUIPMENT SERVICE ACCESS AREAS. CONDUIT FOUND BLOCKING ACCESS AREAS SHALL BE REPOUTED AT INSTALLING CONTRACTOR'S EXPENSE.
- 4. GENERAL REQUIREMENTS: A. APPROVED INSTALLING CONTRACTOR: TRANE CHICAGO, 7100 MADISON, WILLOWBROOK, IL
  - CONTRACTOR TO EXTEND AND MODIFY EXISTING WEB-BASED TRANE SUMMIT SYSTEM TO
  - SERVE ALL NEW EQUIPMENT AND COMPONENTS.
  - CONTRACTOR SHALL REMOVE ALL EXISTING RELAYS, DEVICES, AND CONTROL CONDUIT THROUGHOUT THE BUILDING WHICH SERVED EQUIPMENT OR DEVICES REMOVED EITHER IN THE
  - PAST OR AS PART OF THIS PROJECT. D. CONTRACTOR SHALL PROVIDE ON SITE OWNER TRAINING FOR 2 PEOPLE FOR A TOTAL OF 2 HOURS INITIALLY AND ANOTHER 1/2 DAY (4 HOURS) AT TIMES OF OWNER'S CHOOSING WITHIN THE FIRST YEAR. TRAINING SHALL BE ACCOMPLISHED DURING TIME DEDICATED FOR THAT PURPOSE, NOT IN CONJUNCTION WITH SERVICE WORK.
- SEQUENCE OF OPERATION: HOT WATER BOILER SYSTEM
- SYSTEM OPERATION SHALL BE CONTROLLED BY BASED ON POSITION OF VIRTUAL HEATING/AUTOMATIC/OFF SWITCH LOCATED ON SYSTEM GRAPHICS PAGE. WHEN IN AUTOMATIC POSITION, SYSTEM SHALL AUTOMATICALLY START BOILER SYSTEM AT 60 DEGREES F. (ADJ.) AND TO DISABLE AT 65 DEGREES F. (ADJ.) AS SENSED BY OUTSIDE AIR TEMPERATURE SENSOR.
- 2. IF SYSTEM IS COMMANDED INTO HEATING MODE BY MANUAL OR AUTOMATIC SIGNAL, THE SYSTEM SHALL START AND OPERATE AS FOLLOWS:
  - A. LEAD BUILDING VAV SYSTEM PUMP AND GREENHOUSE SYSTEM PUMP SHALL START AND OPERATE CONTINUOUSLY. IF EITHER LEAD PUMP FAILS TO START WHEN COMMANDED, BAS SHALL SIGNAL ALARM AND LAG PUMP SHALL START. LEAD/LAG STATUS OF PUMPS SHALL BE ALTERNATED WEEKLY OR BY-WEEKLY SO AS TO EQUALIZE RUN TIME ON PUMPS - CHANGE SHALL BE MADE DURING THE DAYTIME WHEN BUILDING MAINTENANCE STAFF IS ON DUTY. NOTE: CHANGE TO BE BASED ON TIME OF DAY, NOT RUN TIME.
  - ONCE FLOW THRU SYSTEM HAS BEEN ESTABLISHED, BOILER MANUFACTURER'S SEQUENCING PANEL SHALL BE COMMANDED TO START BOILER SYSTEM. BOILER MANUFACTURER'S SEQUENCING PANEL SHALL OPERATE BOILERS IN MANUFACTURER'S STANDARD SEQUENCE FOR MAXIMUM EFFICIENCY. IF ANY BOILER IS COMMANDED TO START AND FAILS, AN ALARM SHALL BE SENT TO THE BAS THROUGH THE BOILER SYSTEM CONTROLLER.
- C. IF SYSTEM IS COMMANDED OFF, LEAD SYSTEM PUMPS SHALL OPERATE FOR 10 MINS (ADJ.) BEFORE
- HOT WATER SUPPLY TEMPERATURE SETPOINT SHALL BE CONTROLLED IN ONE OF TWO SELECTABLE WAYS FROM a. METHOD I: HOT WATER TEMPERATURE SHALL BE RESET AS REQUIRED TO KEEP THE 'CRITICAL
  - ZONE' CONTROL VALVE 95% OPEN. THE 'CRITICAL ZONE' SHALL BE DETERMINED BY POLLING ALL VAV/FPB/AHU VALVES THRU THE BAS SYSTEM TO SEE WHICH ZONE REQUIRES THE MOST HEATING. METHOD 2 - OUTSIDE AIR TEMPERATURE RESET: THE HOT WATER SUPPLY TEMPERATURE SHALL
  - BE LINEARLY MODULATED FROM 180 DEGREES F (ADJ.) AT 0 DEGREES F (ADJ.) OUTSIDE AIR TEMPERATURE TO 120 DEGREES F (ADJ.) AT 65 DEGREES (ADJ.) OUTSIDE AIR TEMPERATURE. TEMPERATURE CONTROL CONTRACTOR SHALL PROVIDE NEW O.A. SENSOR ON SHADED NORTHERN FACE OF BUILDING IF NO O.A. SENSOR CURRENTLY EXISTS.
  - c. SYSTEM GRAPHIC SHALL BE MODIFIED TO PROVIDE A 'VIRTUAL SWITCH' TO ALLOW MAINTENANCE STAFF TO SELECT METHOD OF HOT WATER OPTIMIZATION.
- 4. INPUT/OUTPUT SCHEDULE (MINIMUM DDC POINTS REQUIRED.)
- HEATING/AUTOMATIC SYSTEM ENABLE/DISABLE AUTOMATIC SYSTEM DISABLE TEMPERATURE
- AUTOMATIC SYSTEM ENABLE TEMPERATURE MAPPING OF ALL AVAILABLE POINTS AVAILABLE THRU BOILER SEQUENCER COMMUNICATION INTERFACE. MINIMUM REQ'D: BOILER STATUS, BOILER BURNER STATUS, BOILER DISCHARGE
  - TEMPERATURE, ALARMS RETURN WATER TEMPERATURE (T2) SUPPLY WATER TEMPERATURE (T3)
- SUPPLY TEMPERATURE SETPOINT SUPPLY TEMP. OPTIMIZATION METHOD HOT WATER PUMP HWP-I START/STOP
- HOT WATER PUMP HWP-I STATUS HOT WATER PUMP HWP-2 START/STOP
- HOT WATER PUMP HWP-2 STATUS HOT WATER PUMP HWP-3 START/STOP
- HOT WATER PUMP HWP-3 STATUS HOT WATER PUMP HWP-4 START/STOP
- HOT WATER PUMP HWP-4 STATUS K. OUTSIDE AIR TEMPERATURE (TI)

L. COMPUTER GRAPHIC DISPLAY OF SYSTEM

VIRTUAL SWITCH

VIRTUAL SWITCH

AO OR SOFTWARE

AO OR SOFTWARE

AO OR SOFTWARE

DO, DI, AO, AI

### HVAC SYMBOLS AND ABBREVIATIONS

AS	AIR SEPARATOR	HWR	HOT WATER RETURN	——————————————————————————————————————	HOT WATER SUPPLY	<del></del>	STRAINER
BAS	BUILDING AUTOMATION SYSTEM	HWS	HOT WATER SUPPLY	HWR	HOT WATER RETURN	<del></del>	STRAINER WITH BLOWDOWN VALVE
BTU	BRITISH THERMAL UNIT	LWT	LEAVING WATER TEMPERATURE	MU	MAKE-UP WATER	<del></del>	DIRECTION OF FLOW
BTUH	BRITISH THERMAL UNIT PER HOUR	MCA	MINIMUM CIRCUIT AMPS	G	NATURAL GAS	PITCH	PITCH OF PIPE (DOWN)
DB	DRY BULB	MOCP	MAXIMUM OVERCURRENT PROTECTION	D	DRAIN LINE		PIPE ELBOW (TURNED UP)
DN.	DOWN	PD	PRESSURE DROP	——	BALL VALVE (2" \$ SMALLER) BUTTERFLY VALVE (2 1/2" \$ LARGER)	<del></del>	PIPE ELBOW (TURNED DOWN)
EAT	ENTERING AIR TEMPERATURE	PH	PHASE	<del></del>	CIRCUIT BALANCING VALVE W/BALANCING PORTS (8" AND UNDER) CIRCUIT FLOW INDICATOR W/BALANCING PORTS AND MEMORY STOP	<del></del>	PIPE TEE DOWN (DROP)
ET	EXPANSION TANK	PSI	POUNDS PER SQUARE INCH		BUTTERFLY VALVE FOR BALANCING (10" AND ABOVE)	<del></del> 0	PIPE TEE UP
EWT	ENTERING WATER TEMPERATURE	RPM	REVOLUTIONS PER MINUTE		PRESSURE RELIEF VALVE (PIPE TO FLOOR DRAIN)	<del></del>	PIPE TEE UP OR ANGLE
F	FAHRENHEIT	TC	TEMPERATURE CONTROL	<del></del>	DRAIN VALVE WITH HOSE THREADED OUTLET	<del></del>	PIPE TEE DOWN OR ANGLE
GPM	GALLONS PER MINUTE	TYP.	TYPICAL	——————————————————————————————————————	PIPE UNION (OR FLANGES IF 2 1/2" OR LARGER PIPE)	NC	NEW CONNECTION
HP	HORSEPOWER	WB	WET BULB	<u></u> ∏	PRESSURE GAUGE AND NEEDLE VALVE	R	GAS PRESSURE REGULATOR
HWB	HOT WATER BOILER	W.C.	WATER COLUMN	<u> </u>	THERMOMETER (WITH PIPE WELL)	XXX-1	EQUIPMENT TAG
HWP	HOT WATER CIRCULATING PUMP	WG	WATER GAUGE	<del></del>	THERMOMETER WELL	Ø	ROUND
				<del></del>	PRESSURE/TEMPERATURE PLUG WITH CAP		PIPING, DUCTWORK, OR EQUIPMENT TO BE REMOVED

MCHENRY COUNTY COLLEGE - BLG. 'D' **2016 BOILER** REPLACEMENT

8900 US HWY 14 - BLG. 'D' CRYSTAL LAKE, IL 60012

04/13/2016 | BIDDING DOCUMENTS DESCRIPTION Mechanical - Electrical Engineers 1216 Tower Road Schaumburg, Illinois 60173 847.882.201 Fax 847.882.2201 ENGINEERING GROUP LLC

MECHANICAL/ELECTRICAL NOTES, DETAILS, AND SYMBOLS

PROJ. MGR: 20/10 DRAWN BY: 20/10 CHECKED BY: 20/10

**ME-2** © COPYRIGHT 2016: 20/10 ENGINEERING GROUP

FASTENERS -EXISTING ROOF CURB AND FLASHING - EXISTING ROOF - SUPPORT PLATE FURNISHED BY MECH. CONTRACTOR, INSTALLED BY G.C. - VENTILATED THIMBLE 45° CONNECTION -(TYP.) MINIMUM I" GALVANIZED STACK DRAIN — PIPE TO OVER NEAREST FLOOR DRAIN

DOUBLE CONE

RAIN CAP

V-BAND

— RAIN SKIRT

STAINLESS STEEL

VENT STACK. SIZE AND

OR IN SPECIFICATION.

RECEIVER BOTTOM

TYPE AS SHOWN ON PLANS

HIGH TEMP. ELASTOMERIC SEALANT

-STAINLESS STEEL BOX COVER W/

DRAWBAND OR WELD COVER TO STACK

FLUE STACK THRU ROOF DETAIL NO SCALE

## **ELECTRICAL SPECIFICATIONS**

UNISTRUT STAND NEAR PUMP.


SIDE STREAM FILTER AND

**BY-PASS CHEMICAL FEEDER DETAIL** 

- I. ALL WORK SHALL CONFORM TO THE LATEST EDITION OF NATIONAL ELECTRIC CODE AND ILLINOIS PUBLIC COMMUNITY COLLEGE BUILDING
- 2. PROVIDE ALL PERMITS AND INSPECTION FEES.

NO SCALE

- 3. PROVIDE A ONE YEAR WARRANTY ON ALL MATERIALS, EQUIPMENT AND LABOR FROM DATE OF SUBSTANTIAL COMPLETION OF WORK.
- 4. PROVIDE ALL HIS OWN RIGGING, SCAFFOLDING, RUBBISH REMOVAL AND LEAVE SPACE BROOM CLEAN.
- 5. MINIMUM SIZE CONDUIT SHALL BE 3/4" E.M.T. PROVIDE IMC FOR CONDUITS 2" AND LARGER OR WHERE EXPOSED TO WET OR DAMP LOCATIONS. E.M.T. FITTINGS SHALL BE COMPRESSION TYPE. IMC SHALL BE THREADED CONNECTIONS. TRANSITION TO LIQUID TIGHT FLEXIBLE METAL CONDUIT FOR FINAL CONNECTION (LAST 6 FEET MAXIMUM) OF CONDUCTORS SERVING EQUIPMENT SUBJECT TO VIBRATION.
- 6. MINIMUM SIZE CONDUCTOR SHALL BE #12 THHN, OR THWN WHERE REQUIRED, WITH #14 USED FOR CONTROL WIRING. CONDUCTOR MATERIAL SHALL BE COPPER ONLY.
- 7. PROVIDE EQUIPMENT GROUNDING CONDUCTOR IN ALL RACEWAYS.
- 8. CONDUCTOR SIZES #14AWG, #12AWG AND #10AWG SHALL BE SOLID, CONDUCTOR SIZE #8AWG AND LARGER SHALL BE STRANDED. ALL CONDUCTORS SHALL BE COLOR CODED.
- 9. CONTRACTOR SHALL PROVIDE ALL NECESSARY CUTTING AND PATCHING INCLUDING SLEEVES AND INSERTS.
- 10. ALL NEW CIRCUIT BREAKERS SHALL BE BOLT-ON BREAKERS COMPATIBLE WITH EXISTING PANELBOARD. PROVIDE UPDATED TYPEWRITTEN DIRECTORIES IN ALL PANELS.
- II. BEFORE SUBMITTING HIS BID, THE CONTRACTOR SHALL VISIT THE SITE TO ASCERTAIN ALL WORK INVOLVED IN THE PROJECT.
- 12. CONTRACTOR SHALL COORDINATE HIS WORK WITH OTHER CONTRACTORS ON THE PROJECT.
- 13. CONTRACTOR SHALL MAKE NECESSARY MODIFICATIONS AND ADJUSTMENTS TO ALL ELECTRICAL ITEMS AND EQUIPMENT AS MAY BE REQUIRED BY THIS WORK.
- 14. ALL ELECTRICAL EQUIPMENT MUST MAINTAIN WORKING CLEARANCES AS REQUIRED BY NEC.
- 15. FLEXIBLE RACEWAY SYSTEMS SHALL NOT BE USED TO PENETRATE ROOFS, FLOORS AND AIR/MOISTURE BARRIERS.
- 16. RACEWAY SYSTEMS SHALL NOT BE ROUTED THRU OR IN HVAC DUCTS.
- 17. ALL NEW FIRE ALARM CABLING SHALL BE PLENUM RATED CABLE OF TYPE COMPATIBLE WITH EXISTING BUILDING FIRE ALARM SYSTEM.
- 18. ALL NEW FIRE ALARM DEVICE(S) SHALL BE UL LISTED AND OF TYPE AND MANUFACTURER TO MATCH EXISTING. NEW FIRE ALARM DEVICE(S) SHALL BE INTEGRATED INTO EXISTING FIRE ALARM SYSTEM.
- 19. ALL NEW FIRE ALARM CABLES SHALL BE IN CONDUIT EXCEPT WHERE LOCATED ABOVE ACCESSIBLE CEILINGS. FIRE ALARM CONDUITS SHALL BE 1/2" MINIMUM. JUNCTION BOXES SERVING FIRE ALARM DEVICES SHALL BE RED. PROVIDE #18 AWG MINIMUM SIZE CONDUCTOR FOR INITIATING CIRCUITS AND #12 AWG MINIMUM SIZE CONDUCTOR FOR NOTIFICATION CIRCUITS.

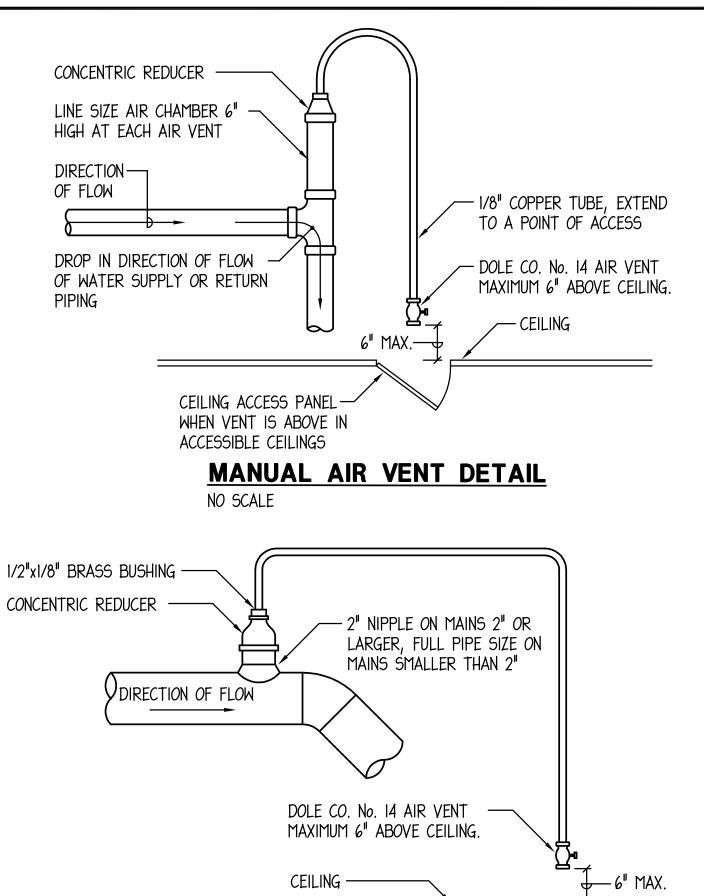

AIR VENT AT HIGH POINTS OF MAINS NO SCALE

CEILING ACCESS PANEL

ACCESSIBLE CEILINGS

WHEN VENT IS ABOVE IN

#### **ELECTRICAL SYMBOL LIST** (NOTE: NOT ALL SYMBOLS ARE USED IN THE PROJECT.)

- EMERGENCY FUEL SHUT-OFF MUSHROOM SWITCH.
- MANUAL MOTOR STARTER, THERMAL OVERLOAD TOGGLE SWITCH.
- 20A. 2P, 3 WIRE, GROUNDING TYPE, 125V. COMMERCIAL-GRADE, DUPLEX RECEPTACLE NEMA 5-20R INSTALLED +16" A.F.F. UNLESS NOTED OTHERWISE. - "GFI" DENOTES RECEPTACLE EQUIPPED WITH INTEGRAL GROUND FAULT CIRCUIT
  - "WP" DENOTES RECEPTACLE WITH WHILE-IN-USE WEATHERPROOF COVER.
- $\boxtimes$ COMBINATION MOTOR STARTER WITH FUSED DISCONNECT, AMPERE RATING, NUMBER OF POLES, FUSE SIZE AND NEMA STARTER SIZE AS INDICATED.

-SWITCH FRAME SIZE. -NUMBER OF FUSIBLE POLES.

FUSE SIZE. -NEMA ENCLOSURE RATING. (NEMA I STANDARD, 3R OUTDOORS AND WET LOCATIONS U.N.O.)

FUSIBLE SWITCH RATING TAG. 30/3/30/3R NEMA 00\_ ---NEMA STARTER SIZE.

MOTOR CONNECTION, HORSEPOWER, VOLTAGE AND PHASE AS NOTED. 10

CEILING JUNCTION BOX.

WALL MOUNTED JUNCTION BOX.

De. JUNCTION BOX WITH FLEXIBLE CONDUIT AND FINAL CONNECTION TO EQUIPMENT

CONDUIT ROUTED CONCEALED IN WALLS AND CEILING. HASH MARKS DENOTE QUANTITY OF #12 CONDUCTORS OR AS NOTED.

> CONDUIT ROUTED EXPOSED. INSTALL PARALLEL TO WALLS AND CEILINGS. HASH MARKS DENOTE QUANTITY OF #12 CONDUCTORS OR AS NOTED.

CONDUIT ROUTED BELOW GRADE. HASH MARK DENOTES QUANTITY OF #12 CONDUCTORS OR AS NOTED.


— DENOTES CONDUIT, 3/4" MINIMUM

— DENOTES INSULATED GROUND WIRE, #12 AWG MINIMUM

LONG TICK MARK DENOTES NEUTRAL CONDUCTOR, #10 AWG MINIMUM

— SHORT TICK MARK DENOTES LINE (HOT) OR SWITCH LEG CONDUCTOR, #12 AWG MINIMUM.


CIRCUIT BREAKER PANELBOARD.

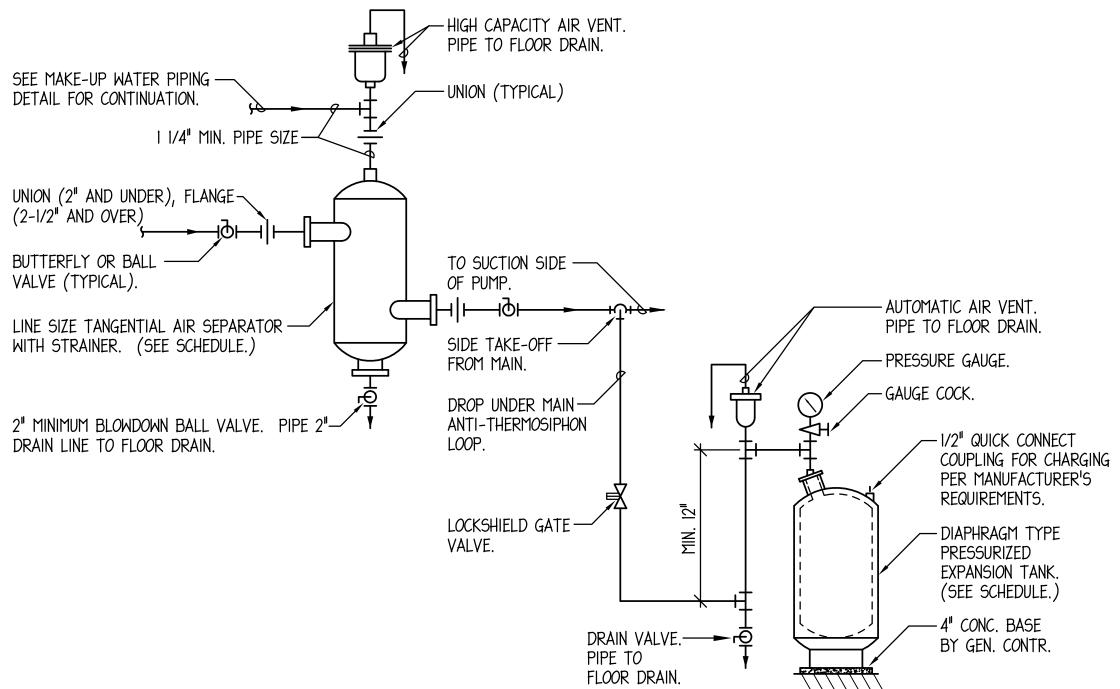


## PRESSURIZED HYDRONIC AIR CONTROL DETAIL

NO SCALE

- I. PIPING CONTRACTOR SHALL FURNISH/INSTALL WELL FOR TEMPERATURE SENSOR AND TAP FOR SWITCH AS SHOWN FOR FUTURE USE EVEN IF SENSOR OR FLOW SWITCH ARE NOT PROVIDED UNDER THIS PROJECT
- 2. PROVIDE FLOOR MOUNTED UNISTRUT STAND TO SUPPORT PUMP ABOVE FLOOR NEAR WALL. MAINTAIN

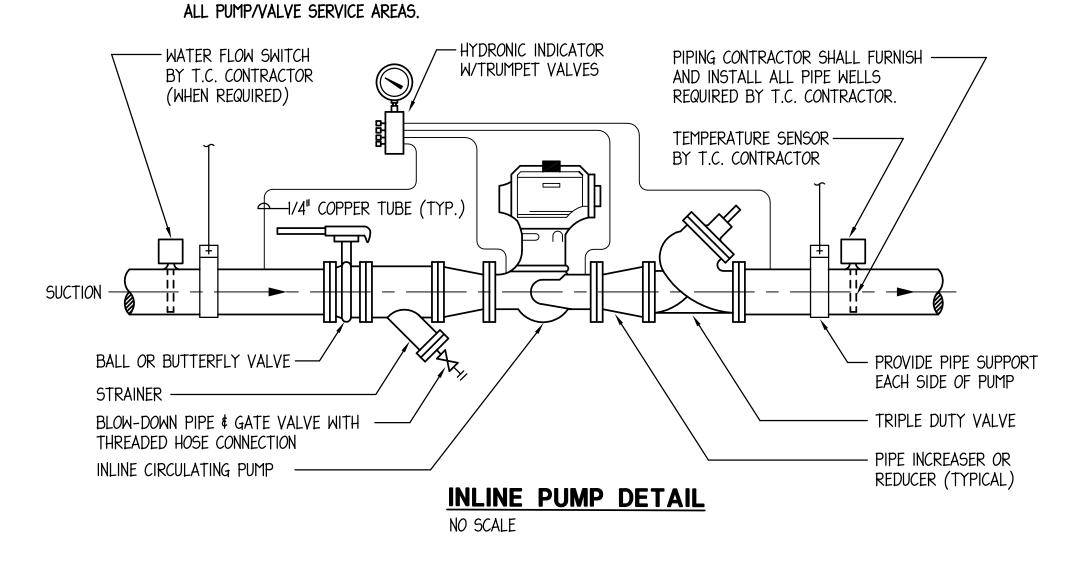



CRYSTAL LAKE, IL 60012

04/13/2016 BIDDING DOCUMENTS Mechanical - Electrical Engineers 1216 Tower Road Schaumburg, Illinois 60173 Fax 847.882.2201 ENGINEERING

MECHANICAL/ELECTRICAL NOTES AND DETAILS

PROJ. MGR: 20/10 DRAWN BY: 20/10

**ME-3** 

GROUP LLC

CHECKED BY: 20/10